

VERLINDE is:

The leading French manufacturer and exporter of lifting and handling equipment.

A comprehensive range of 30 groups of lifting equipment from 60 to 250,000 kg.

ISO 9001 Quality control certified and ISO 14001 Environmental Management Systems.

In France:

A sales network and after sales service points, EUROPONT travelling crane construction plants and a distributor network.

Abroad:

A customer service in more than 92 countries.



VERLINDE is committed to respecting the environment and we always strive to minimize the impact of our operations and our products. By investing in smart, connected, resource and energy efficient products from VERLINDE, you can significantly reduce your own environmental impact.

VERLINDE
LIFTING EQUIPMENT

NEXT LEVEL
PARTNERSHIP



Verlinde website

This document and the information contained herein, is the exclusive property of VERLINDE S.A.S. and represents a non-public, confidential and proprietary trade secret that may not be reproduced, disclosed to third parties, altered or otherwise employed in any manner whatsoever without the express written consent of VERLINDE S.A.S.
Copyright © VERLINDE S.A.S. All rights reserved.

2, boulevard de l'Industrie | ZI des Vauvettes
28500 Vernouillet | France

+33 (0)2 37 38 95 95 | www.verlinde.com


Follow us:



MYVERLINDE
CUSTOMER PORTAL
www.my.verlinde.com

ATEX equipment Ex-marking

According to directive 2014/34/EU and related EN standards.

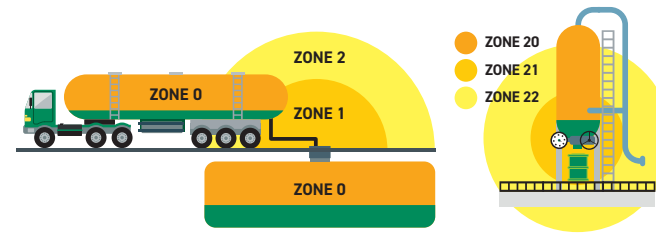

Substance	Presence of substance	Zone	Equipment category	Equipment protection level
Gas	Continuously or for long periods or frequently	0	1G	Ga
	Likely to occur in normal operation occasionally	1	2G	Gb
	Not likely to occur in normal operation but, if it does occur, will persist for a short period only	2	3G	Gc
Dust	Continuously or for long periods or frequently	20	1D	Da
	Likely to occur in normal operation occasionally	21	2D	Db
	Not likely to occur in normal operation but, if it does occur, will persist for a short period only	22	3D	Dc

Explosion protection symbol



II

2G

Ex

h

IIC

T4

Gb

Equipment group
I: Underground equipment (mines)
II: Above ground equipment

Prefix for protection concept(s)

Maximum surface temperature

Dust	Actual temperature value e.g. T120°C
Gas	T1: 450°C - T2: 300°C - T3: 200°C T4: 135°C - T5: 100°C - T6: 85°C

GAS group

Typical Gas

IIA

Propane

IIB

Ethylene

IIC

Hydrogen

OR

DUST group

Hazardous substances

IIIA

Combustible volatile substances

IIIB

Non-conductive dusts

IIIC

Conductive dusts


*Not all possible protection concepts are listed.

VERLINDE
EXPROOF

A complete range
from **500** to **80 000 kg**



EUROBLOC VT

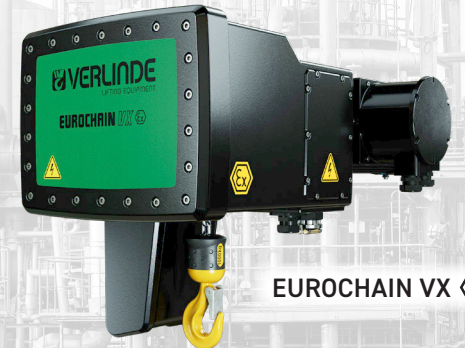

EUROCHAIN VX

NEXT LEVEL
PARTNERSHIP

Available for all environments ATEX :
Zone 1, 2, 21, 22.

Certified for any regions of the world.

Key components developed and
manufactured in our Hameenlinna
factory.

Gearboxes, motors, electrical cubicles...


Wide choice of possible options.

Radio, ex-bronze treatment for wheels,
stainless steel chain...

CHD 

From 500 kg
to 10 000 kg

- Easy to install and use.
- Proven technology.

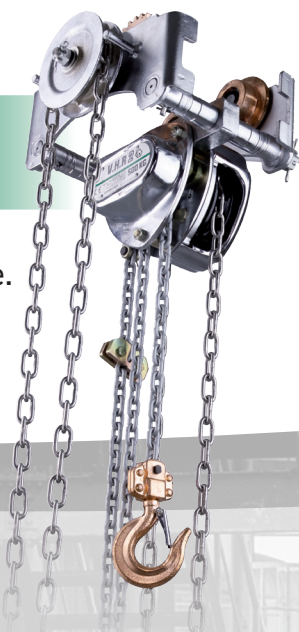

NEXT LEVEL
PARTNERSHIP

EUROCHAIN VX

Zone 22

- Compact and robust design based on
our Eurochain VX.



From 160 kg
to 1 000 kg


EUROCHAIN VX NEW PRODUCT

- Dual-speed for lifting.
- Most compact design of the market.
- Inverter travelling speed.
- Most competitive manufacturing
lead-times of the market.



From 320 kg
to 2 500 kg

EUROBLOC VT

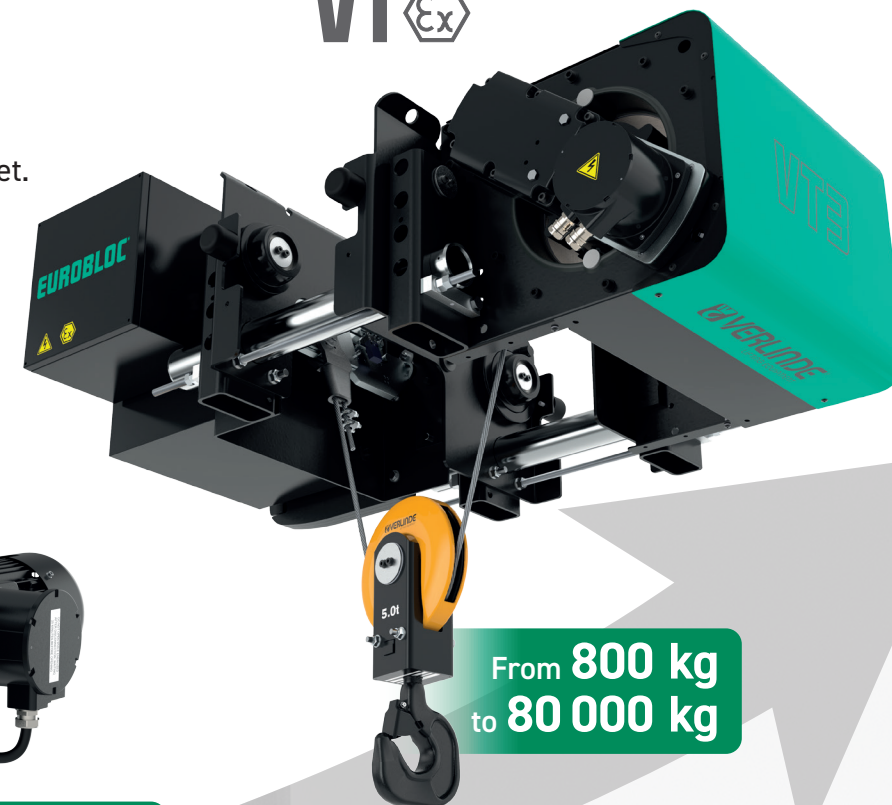

From 800 kg
to 80 000 kg

- Dual speed for lifting.
- Recognized and market-proven
product range.
- Most compact design of the market.
- Most competitive manufacturing
lead-times of the market.